

LOCK-ON GREASE COUPLER

GURTECH™

Trigger Activated Lock-On Mechanism

- Simply depress the trigger to lock the coupler onto the grease nipple or to release the coupler when done
- Easy clip-off, regardless of pressure build up in the line, NO MORE stuck couplers
- No need to hold while greasing. Lock-on and free up both hands to operate your grease gun
- Patented Design

Leak Free, High Pressure Seal

- Leak Free, High Pressure Seal
- Durable long lasting seal
- Floating seal design accommodates all Zerk type grease nipples

Four hardened spring steel jaws

Resilient under high pressure
Fits all DIN and SAE specification Zerk grease nipples.




Sliding Sleeve

Securely locks the coupler onto the Zerk.
When you pump grease ... it stays on!

Female Thread

Multiple thread sizes, to fit most grease guns.

Extra length to access
hard-to-reach grease nipples

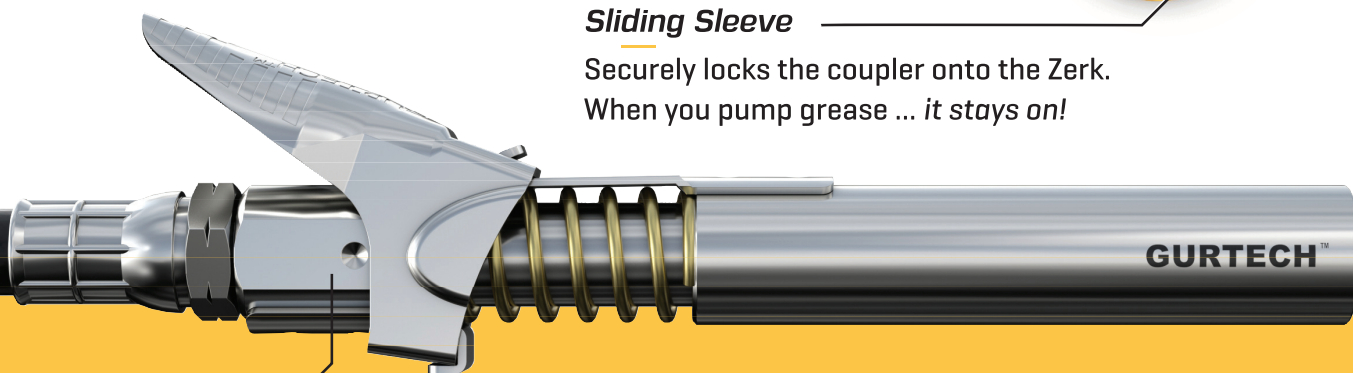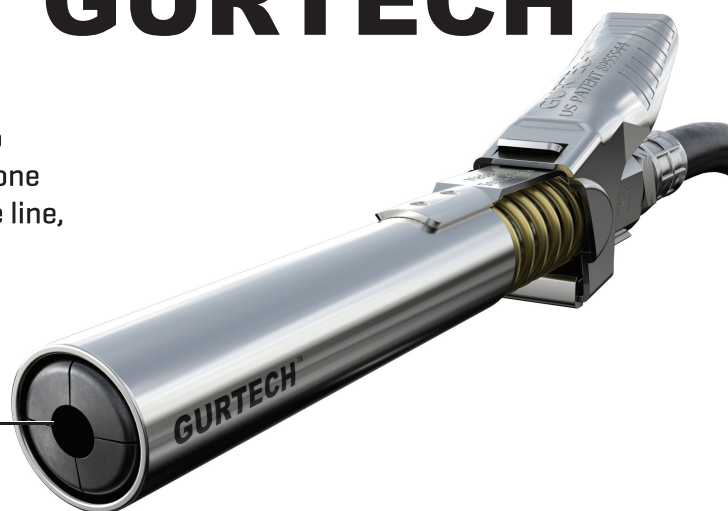

Description	Specifications
Max Working Pressure	10,000 psi [690 Bar]
Zerk Compatibility	Fits all DIN and SAE specification Zerk grease nipples
Thread Type	1/8" NPT, 1/8" BSP or M10 x 1
Dimensions	L 5 1/2" x W 21/32" x H 1 1/2" [L 138mm x W 16.4mm x H 41 mm]
Front Diameter	0.63" [16mm]
Weight	4 oz [100g]
Compatibility	All grease gun types [pneumatic, manual and electric]
Seal Type	Durable TPU seal for longevity under high pressure
Lock on Mechanism	4 x hardened spring steel jaws, resilient under high pressure
Patents	US8955544, EP2531766 [others on application]