

# LOCK-ON GREASE COUPLER

# GURTECH™

## Trigger Activated Lock-On Mechanism

- Simply depress the trigger to lock the coupler onto the grease nipple or to release the coupler when done
- Easy clip-off, regardless of pressure build up in the line, NO MORE stuck couplers
- No need to hold while greasing. Lock-on and free up both hands to operate your grease gun
- Patented Design

## Leak Free, High Pressure Seal

- Leak Free, High Pressure Seal
- Durable long lasting seal
- Floating seal design accommodates all Zerk type grease nipples

## Four hardened spring steel jaws




Resilient under high pressure  
Fits all DIN and SAE specification Zerk grease nipples.

## Sliding Sleeve

Securely locks the coupler onto the Zerk.  
When you pump grease ... it stays on!

## Female Thread

Multiple thread sizes, to fit most grease guns.

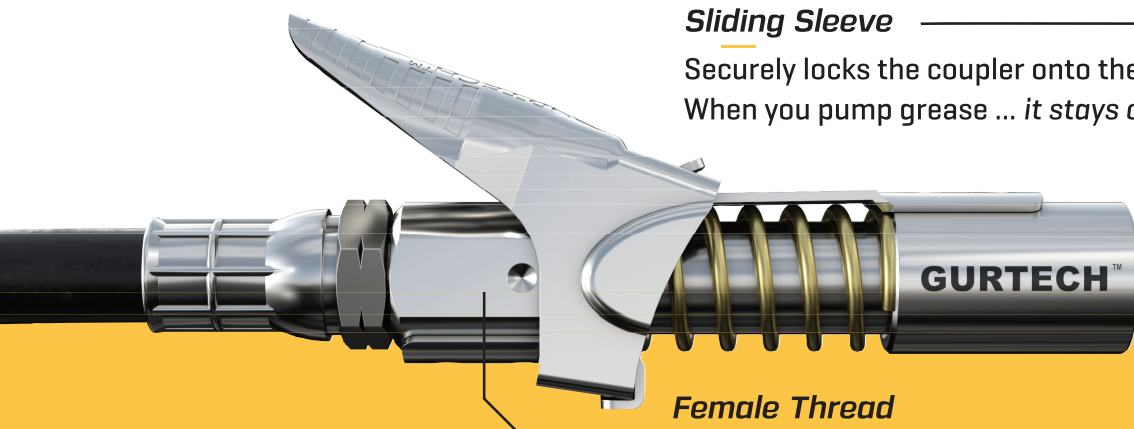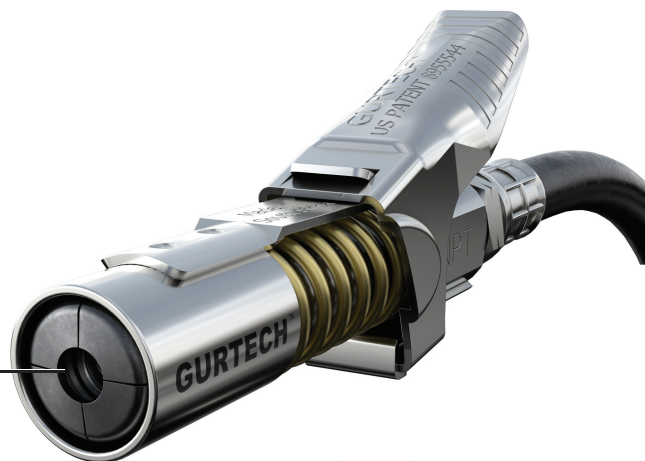

Description	Specifications
Max Working Pressure	10,000 psi [690 Bar]
Zerk Compatibility	Fits all DIN and SAE specification Zerk grease nipples
Thread Type	1/8" NPT, 1/8" BSP or M10 x 1
Dimensions	L 3 1/2" x W 2 1/32" x H 1 1/2" [ L 88mm x W 16.4mm x H 41 mm]
Front Diameter	0.63" [16mm]
Weight	4 oz [100g]
Compatibility	All grease gun types [pneumatic, manual and electric]
Seal Type	Durable TPU seal for longevity under high pressure
Lock on Mechanism	4 x hardened spring steel jaws, resilient under high pressure
Patents	US8955544, EP2531766 [others on application]