GURTECH[™]

Patented pressure return system

Simply lift lever to return residual pressure back to cartridge

- Saves grease Eliminates dribble and mess
- Extends grease coupler life and Zerk nipple life

700mm 27½" high pressure hose

Grease coupler retainer LIFT TO RELEASE PRESSURE

Ergonomic grip handles

Patented lock-on grease coupler


Versatile cartridge adaptor system

Robust levers and linkages

High strength holding magnet

- Allows for one handed operation
- · Easy storage



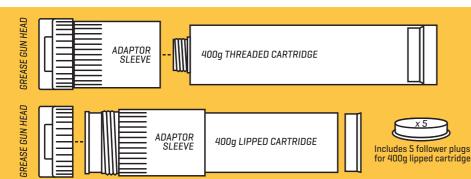

Versatile cartridge adaptor system

Description	Specification
Max Delivery Pressure	5,800 psi (400 Bar)
Delivery Rate	0.04 oz (1.2 ml) per stroke
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Cartridge Compatibility	400 g Lipped/threaded cartridge
Delivery Hose	27.5" (700 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT, 1/8" BSP or M10 x 1
Dimensions	L 18½" x W 7½" x H 2¾" (L 470 x W 190 x H 70 mm)
Weight	Dry weight 3.4 lbs (1.54 Kg)
Pump Activation	Manual hand lever
Pump Mechanism	Self-priming with pressure return valve
Grease Coupler	Heavy-duty, high pressure. Max working pressure 10,000 psi
	(690 Bar). Trigger activated lock-on patented coupler
Patents	AU2018282292 (others on application)